


INSTRUCTIONS FOR TIMER - CAT # MCT-3

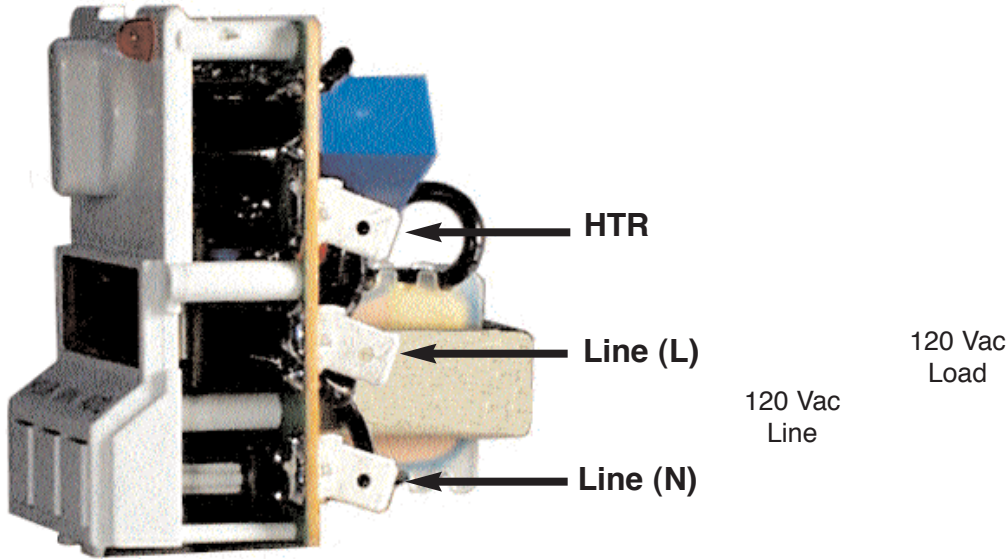

This device was designed for use in a "MR COFFEE" coffeemaker. It is designed to automatically turn on the unit at a predetermined time. It turns off automatically after two hours. It can be adapted for use with other 120 Volt devices that operate on 10 Amps or less.

Caution: Be careful when working with 120 Vac lines. You can get a severe electro-shock which can be painful or worse. Do not touch bare wires. Keep wires from touching each other. Unit in should be housed in an enclosure to prevent contact with live wires.

Connection:

Connect 120 Vac source to terminals marked Line (N) and Line (L).

Connect 120 Vac device that you wish to operate (Load) to terminals marked Line (N) and Heater (HTR).

Set clock to current time by pressing hour and minute buttons.

Operation:

To turn on device without timer: Turn white knob to right. LED lights, and power goes to device connected to HTR terminal.

To use with timer: Set timer turn-on time by pushing hour and minute buttons while holding down "Auto" button. Turn white knob to left. When desired turn-on time is reached, the LED will light and device will receive power.